




# LARSA Click! 120RA

The lamp has all the benefits of the LARSA System and is an excellent lighting alternative **for gypsum ceilings and flat surfaces**. The luminaire guarantees the continuity of light and assembly is incredibly easy. Simply screw in the clips and insert the LARSA lamp. You will know it's all done when you hear the characteristic: „Click”.


This lamp was created specifically for the printing, textile and trade industries. However, it can also be installed in dental practices and any other space where colour rendering is a priority. The advanced LED technology allows for **colour rendering index (CRI) over 95**.

## Parameters

Power	20 W
Input voltage	24V DC (SELV)
Beam angle	140°
Colour	Neutral white
Colour temperature	5000 K
Luminous flux	1600 lm
LED durability	50.000 h
Ambient temperature range	From 2°C to 40°C
Controls and dimming	Dimmable
IP code	IP40
<b>Colour Rendering Index (CRI)</b>	<b>&gt; 95</b>
Energy class	A+



## Montage

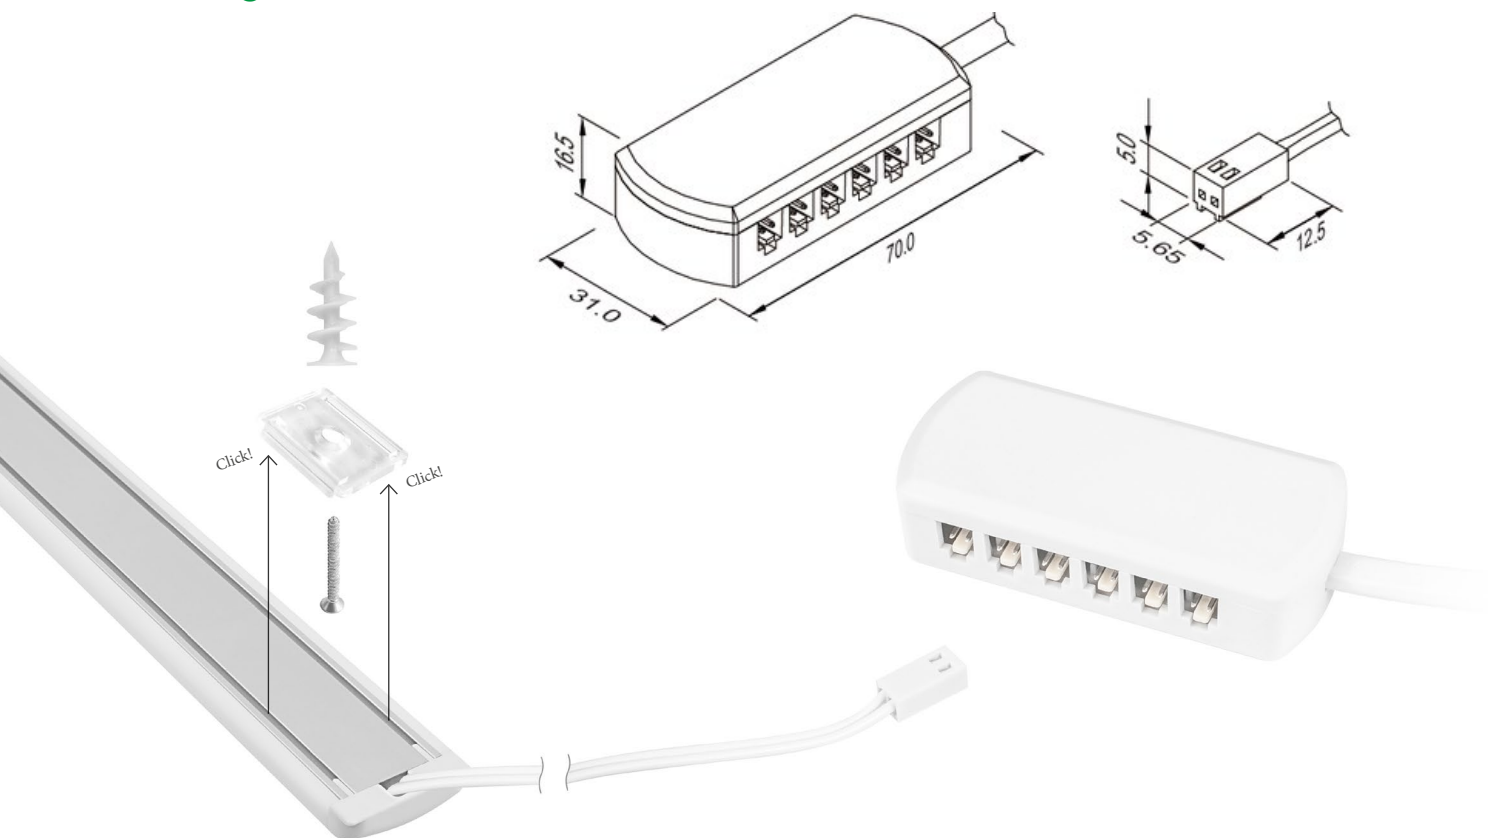

## Dimensions [mm]

